AS 65 2T ES

The AS 65 guarantees permanent traction, manoeuvrability and safety via a differential lock in conjunction with a 5-speed manual transmission.

The AS-cross-blade system chops the grass reliably and produces an impressive mowing power, wherein the cutting force is maximised by an engine / blade coupling of 2:1.

Engine protection and blade clutch through a separation of engine and blade shaft.

AS 65 4T B&S

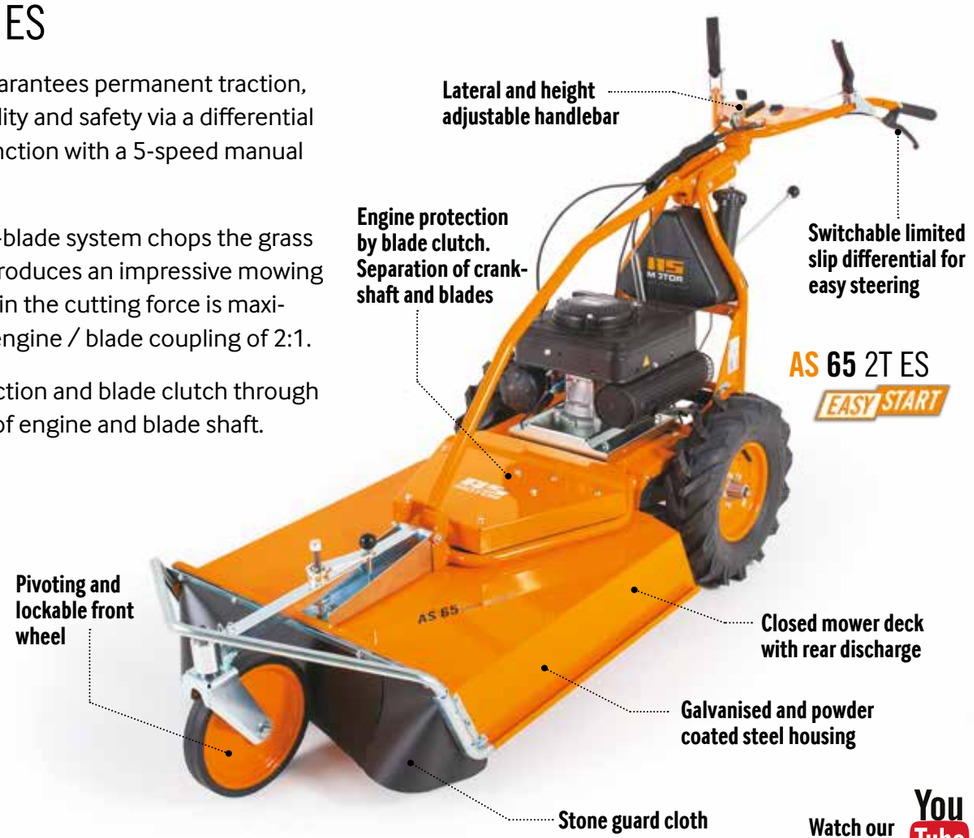

Watch our videos on: YouTube

BLADE SYSTEM

The AS-cross-blade system cuts and chops at the same time, even high grass and undergrowth.

HEIGHT ADJUSTMENT

Easy, central cutting height adjustment, variable 50 – 100 mm.

MANUAL TRANSMISSION

The 5-gear manual transmission with differential lock ensures optimal drive even on wet grass.

AUTOMATIC BRAKE

When releasing the drive lever the machine will immediately stop even on steep slopes.

AS ALLMÄHERS® FOR PROFESSIONAL USE IN HARSH CONDITIONS

When the task at hand is professional care of green areas with high growth or on steep slopes Allmäher® models AS 65, and AS 73 are used. For example, the AS 65 in the 4T B&S variant with maximum 13 hp offers incredible performance and a 65 cm cutting width and a easy handling.

TECHNICAL SPECIFICATIONS

Accessories overview, see page 60

Model	Cutting width	Engine	Rated power	Maximum engine power	Wheel drive, speed	Cutting height adjustment	Work rate m²/h	Weight, operating dimensions	Item number
AS 65 2T ES	65 cm	AS 2-Stroke Engine 165 ccm	4,5 kW (6,1 hp) at 3.800 rpm	4,9 kW (6,7 hp) at 4.500 rpm	Rear-Wheel drive 1,6 – 4,5 km/h, Reverse 2,2 km/h	central, 50 – 100 mm variable	max. 2.900	116 kg L 220 cm, W 71 cm, H 99 cm	G06700100
AS 65 4T B&S with oil- and fuel pump	65 cm	B&S 4-Stroke Engine Series 3 INTEK, 344 ccm	7,6 kW (10,3 hp) at 3.300 rpm	9,7 kW (13,0 hp) at 3.600 rpm	Rear-Wheel drive 1,6 – 5,1 km/h, Reverse 2,4 km/h	central, 50 – 100 mm variable	max. 3.300	125 kg L 220 cm, W 71 cm, H 99 cm	G06700008