


Toro® Dingo® Compact Utility Loaders



Always there to help you care for your landscapes. **Count on it.**

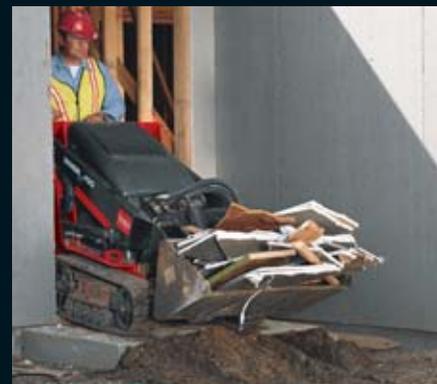

Our purpose.

To help customers beautify and preserve their outdoor landscapes with environmentally responsible products of quality and innovation.

Our promise.

Toro® is always there to help you care for your landscapes the way you want, when you want, better than anyone else.

Our track record of performance.

Since its start in 1914, Toro's heritage has been rooted in durable commercial equipment. Beginning with the first Toro machine ever sold, our engineers have been committed to creating durable and reliable machines — like the Dingo® loader — to help professionals like you do your job better and faster. From homes to golf courses, to the high-profile properties of Disney, the Indianapolis Motor Speedway, the White House, and every playing field in Super Bowl history — Toro equipment continues to

provide the enduring performance and quality required to establish and maintain an impeccable image.

Our commitment to serve you.

At Toro, help is always easy to find. Get answers to your questions about equipment, parts, service, and other important information by calling 800.DIG.TORO (800-344-8676); sending an e-mail to Dingo@Toro.com; or visiting the company's Web site at www.toro.com/dingo, where you'll find information on dealer and rental locations, registration, owner's manuals, parts and safety information, and much, much more.

What makes the Toro® Dingo® the #1 selling compact utility loader?

Welcome to the hardest working, most reliable, and versatile compact utility loader on the market. The compact-equipment equivalent of a Swiss Army™ knife, the Toro Dingo loader and its uses are unlimited.

Use it to ...

- Maximize manpower and minimize hand labor.
- Increase productivity and finish jobs faster.
- Take on more work and expand your business.
- Tackle virtually any task using 35-plus attachments.
- Work in tight spots where other machines can't reach.
- Go almost anywhere with a light footprint on existing turf.

Imagine the jobs you can do and the time you can save. Every Dingo model gives you effortless maneuverability with virtually no learning curve for even the most inexperienced operator. No wonder it's the top-selling compact utility loader available today.

Seven models and one goal: productivity.

At Toro, innovative product development teams continue to make the line of Dingo compact utility loaders better, stronger, and more versatile. Currently, the family includes seven models, encompassing both gasoline and diesel, and wheeled and tracked units in walk-behind and ride-on designs. Any model you choose offers amazing hydraulic power, all in a compact, maneuverable package.

- Hydraulic power supplied where you need it most – to the drive wheels, tracks, or hydraulic attachments.
- 13 to 25 hp engines available.
- Traction to take on hills, mud or sand.
- Gentle on turf.

The versatility of more than 35 attachments means you can ...

- | | | |
|-------------|------------|-------------|
| • Lift | • Demolish | • Rake |
| • Carry | • Till | • Fill |
| • Dig | • Grade | • Auger |
| • Cultivate | • Level | • Sweep |
| • Trench | • Mix | • And more! |

"We do irrigation, retaining walls, fences, arbors, gates, decks, planting, lawn amendments, water features — the more attachments you have and the speed with which you can change them out, the more versatile and efficient you can be in your own work."

*—Richard Hedahl
Hedahl Landscape Construction
& Design, Silverdale, WA*

How to choose the Toro® Dingo® that's **right for you.**

To provide you with the “best fit” — equipment that helps make you more productive and profitable — Toro offers seven different compact utility loaders. Your Toro dealer can assist you in deciding which Dingo model, tracked or wheeled, diesel or gas engine, will deliver the best performance in your applications, but here are some considerations to help get you started.

- The type of fleet you currently operate — gas or diesel
- The availability of service technicians — gas and/or diesel — in your area
- The ground/soil types (rock, clay, sand, turf) in which you operate
- The altitude and climate in which you work
- The attachments your business needs



Benefits of Each Type of Toro Dingo

While your operation's specific needs should be discussed with your Toro dealer, here are a few general advantages for each model type.

Tracked Models

- Improved flotation for better traction and a light footprint in sandy or wet ground conditions
- Higher operating capacity for added lifting ability
- Operator-friendly controls

VS.

Wheeled Models

- Better maneuverability in tight spaces, due to short wheelbase design
- Longer tire wear on hard surfaces, plus faster transport speeds
- Improved visibility of working area from integrated operator platform

Gas Models

- Easier “do-it-yourself” maintenance and lower repair costs
- Better starting in cold conditions
- Readily available fuel
- Lower up-front investment

VS.

Diesel Models

- Better performance in high altitudes and warmer climates
- More net horsepower improves traction and delivers added torque to attachments
- Longer engine life

The Toro® Dingo® TX 413. A **great package** for the jobs you do most often.

We combined our five most popular attachments with one great machine, and loaded it all on a convenient trailer to give you what you use most. The Toro Dingo TX 413 works hard with the power of a 13 hp engine. Lightweight. Easy to transport. Easy to maneuver. Gentle on turf. What you're used to doing by hand can now be done in a snap...by the TX 413.

The perfect size for easy access to confined areas.

- Only 33.7" wide
- Made to fit through standard 36" gates and small work sites

High-performance track system combined with the power you need to work all day.

- Exceptional traction and flotation with the proprietary track design
- 7 gpm @ 2,540 psi hydraulic pressure

A custom designed trailer makes this equipment package your toolbox for landscaping.

Fully loaded trailer is easily pulled by many vehicles. Conveniently carries your machine and various combinations of these attachments:

- Auger power head with auger bit
- Trencher
- Adjustable forks
- Leveler
- Bucket

Toro Dingo TX 413 and Trailer

TX 413

- 13 hp Honda® gasoline engine
- Track width – 5.88"
- Width – 33.7"
- Weight w/out bucket – 1340 lbs.
- 3.6 psi ground pressure

TX 413 Trailer

- 5' 4" x 9' bed
- 3500 lbs. GVW axle
- 2 inch diameter ball
- Surge brakes
- Flat 4 wire harness plug
- ST225/75R15 tires

The five attachments you use most to get the most done.



Trencher (2')



Auger Power Head
(up to 24")



Bucket



Leveler



Adjustable Forks



"People get nervous about operating a new piece of equipment, but the Toro® Dingo® is something you can teach in five minutes, and within half-an-hour, a new employee is pretty proficient."

— Paul McCaslin, Owner
Redbird Landscaping
Fenton, MO

The Toro® Dingo® TX tracked models.

Now you're **working smarter**, not harder.

Toro Dingo TX compact utility loaders possess the versatility to handle countless jobs on every site. Dig, haul, plant, and build. Designed by Toro engineers specifically for professionals, this compact utility loader is an innovative, rugged, and dependable piece of equipment professionals can use every day, for virtually every job.

Power you can count on.


- Pumping 11.4 gpm @ 3000 psi, the incredible hydraulic power easily runs attachments.
- The high-flow 4-pump hydraulic system directs power where it is needed.
- Quick-change dripless flush-face couplers keep the hydraulic system clean.

A lot more work, in a lot less time.

- Uses for the Toro Dingo TX 420 and 425, plus more than 35 available attachments, are limited only by your imagination.
- Toro's exclusive TX control system is easy to learn; new operators are instantly productive with true command for accurate performance.
- Walk-behind operator position provides 360° visibility and comfortable operation.
- Optional platform allows ride-on capability when traveling long distances.

Make tracks with the Toro Dingo TX loader.

- Durable Kevlar® reinforced tracks offer extended life.
- Tracks disperse weight, giving high flotation and a light footprint on delicate turf, yet delivering the necessary traction in loose sand or mud.
- Open design of traction system prevents the collection of sand, rocks, mud, and debris that could jam tracks.

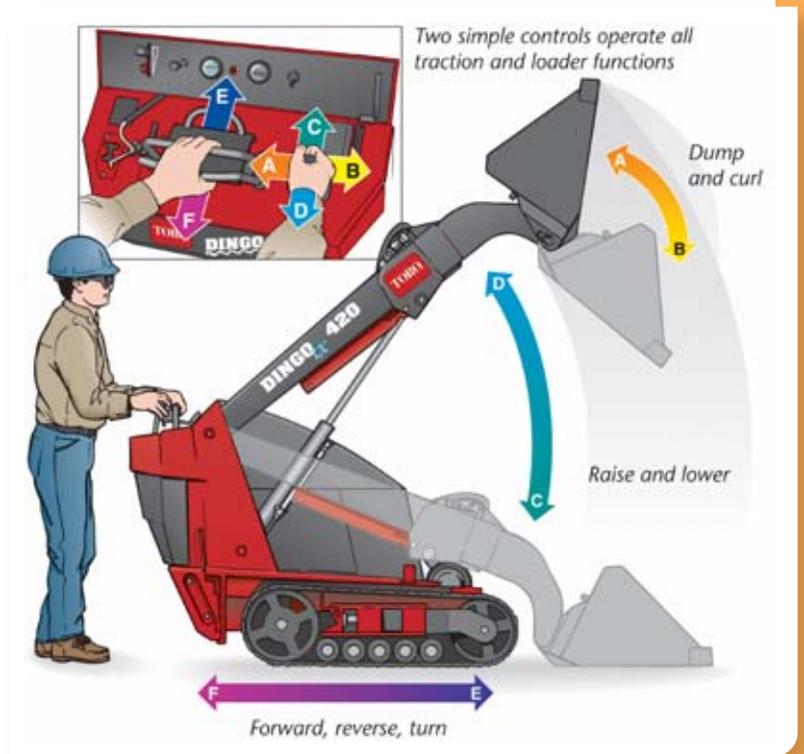

Patented, easy-to-use controls make for more productive workers.

Toro Dingo Tracked Models

TX 420

- 20 hp Kohler® gasoline engine
- Track width – 5.9"
- Width - 33.7"
- Weight w/out bucket – 1880 lbs
- 5 psi ground pressure



TX 425 Wide Track

- 25 hp Kohler gasoline engine
- Track width – 9.5"
- Width - 41.5"
- Weight w/out bucket – 2060 lbs
- 3.5 psi ground pressure





"The Dingo® TX is guaranteed to show up on time every day and perform. The diesel engine complements my existing fleet and gives me the comfort of knowing I have the extra torque necessary for those difficult jobsite needs."

— Barry Hentges
Blue Water Irrigation
New Prague, MN

The **durability** of a diesel. The **flexibility and legendary performance** of a Toro® Dingo® compact utility loader.

Introducing the latest additions to Toro's full family of Toro Dingo compact utility loaders.

Our new diesel models deliver what customers want: extra torque, longer engine life, and increased hydraulic flow for enhanced performance of ground-engaging attachments. And because they're part of the full-line family, these diesels are compatible with all of Toro's compact utility loader attachments.

Diesel. Done Right.™

Toro defined the compact utility loader market and we continue to stay true to the category. These machines are built right ... delivering what we believe is the highest power-to-weight ratio — and the lightest footprint — in the compact utility loader category.

Hydraulic performance beyond the category ...

The TX 525 models' auxiliary hydraulic performance makes the most challenging ground conditions irrelevant by pumping 24 hp to the attachment. Four independent hydraulic pumps deliver ...

- 16.9 gpm of flow to each track.
- 13.8 gpm to the auxiliary.
- 6 gpm to the load arm.

Engine torque for those difficult job conditions

- The diesel engine torque curve combined with the added auxiliary horsepower provide attachments the added power tough jobs require.
- Pound for pound and power for power these machines are unmatched in the category.



Toro Dingo Diesel Models

TX 525

- 25 hp Kubota® diesel engine
- Track width – 5.9"
- Width – 33.7"
- Weight w/out bucket – 1904 lbs
- 5.2 psi ground pressure



TX 525 Wide Track

- 25 hp Kubota diesel engine
- Track width – 9.5"
- Width – 41"
- Weight w/out bucket – 2001 lbs
- 3.4 psi ground pressure





"You could put three guys with shovels next to the Toro® Dingo® and they wouldn't be able to match its digging power. This is an invaluable machine."

— Bob Maffei, Owner
Maffei Landscape Contractors
Mashpee, MA

The Toro® Dingo® wheeled models. The original compact utility loaders **packed with the power** you need.

Productive, no matter how you look at it.

- Supporting more than 35 attachments, the Dingo 220 and 323 will continue to astonish you with what they can accomplish.
- Ride-on platform provides improved visibility of your working area and attachments.
- At only 40¹/₂" wide and with zero-turn capability, you can access confined spaces you never dreamed possible.
- Removable counterweight allows you to add lift capacity or increase down pressure for optimal attachment performance.
- Short length results in efficient trailering.

4-Paw® independent 4-wheel drive system.

Four independent wheel motors deliver hydraulic flow and pressure to all four wheels at all times on the Toro Dingo 323 model.

- Improves traction
- Increases mobility
- Reduces chances of getting stuck
- Less moving parts, reducing maintenance

Reliable hydraulic power, time after time.

- Pumping 10.8 gpm @ 3000 psi, these machines have incredible hydraulic power.
- Powerful 2-pump hydraulic system for efficient separation of power to attachments, wheels or loader arms.
- Quick-change dripless flush-face couplers keep hydraulic system clean.



Toro Dingo Wheeled Models

220

- 20 hp Kohler® gasoline
- Air-cooled engine
- One, 4-gallon fuel tank
- High-capacity air filter
- Mechanically driven by hydraulic pumps



323

- 23 hp Kohler gasoline
- Air-cooled engine
- Two, 4-gallon fuel tanks
- High-capacity, remote air filter
- 4-Paw hydraulic traction control



Genuine Dingo® attachments. **Superior design** for long-lasting, dependable performance.



Change attachments in seconds with no lifting. Easy as 1-2-3.

- 1) Mount to the attachment plate on the unit.
- 2) Twist pins to locked position.
- 3) Connect hydraulic lines to driplless flush-face quick couplers on loader arms.

A perfect fit.

Genuine Toro® Dingo® attachments are your best assurance for attaining a long life and peak performance from your loader. Toro offers more than 35 attachments that are designed specifically for, and fit the front of, the Dingo machine. The attachments are easy to operate, delivering clear sight lines, excellent operator mobility, plus easy on and off — typically in seconds.

Protect your investment by using only genuine Toro attachments — all backed by a one-year warranty, plus ...

- **Shielded seals** on hydraulic attachments, providing two protective components to the vital hydraulic mechanism.
- **Heavy-duty, high-performance hydraulic motors** with flow and pressure ratings designed for optimal operation and life of the equipment.
- **Heavy-duty bearings** working in the heart of each design for longer life.
- **High-abrasion-resistant materials** on all ground-engaging parts, proven to sustain years of heavy use.

The following pages provide a short overview of our long list of attachments. Read on to see what you could do with a Toro Dingo compact utility loader.

Genuine Toro Parts

With Toro, quality and service don't end when you take delivery of your equipment. Genuine Toro parts are designed specifically for your machine to ensure it performs as intended.

Toro's commitment to you extends deep into our heritage and is demonstrated by our industry-leading 98% fill rate, full one-year warranty and on-time delivery. With Toro, you get much more than quality equipment, you get commitment and dedication from hundreds of people to ensure the uninterrupted productivity and durability of your equipment.

Pro Parts Express

Toro's Pro Parts Express program minimizes downtime. Toro's expansive dealer network ensures ready access to the parts and service you will need from time to time. Although our dealers are well stocked, it's not feasible for them to carry every part. When your Toro dealer does not have the part you need, they can order it and have it shipped to you directly from Toro, saving you precious time. Now that's superior customer service. Ask your dealer about Toro Pro Parts Express today.

(Not available in Canada.)

High-Speed Trencher

High-speed design is ideal for fast, efficient trenching in soft to medium soil conditions. Comes standard with 36" boom and safety bar (chain sold separately). Auger speed: 187 rpm at 11gpm; Torque: 442 ft/lbs at 3000 psi; Weight: 390 lbs.

High-Torque Trencher

High-torque, heavy-duty drive system guarantees performance in any soil condition from rock to clay. Dig trenches up to 42" below grade. Heavy-duty nose roller bearing and reversible abrasion-resistant boom give you years of dependable use. Comes standard with 36" boom and safety bar (chain sold separately). Auger speed: 120 rpm at 11gpm; Torque: 675 ft/lbs at 3000 psi; Weight: 390 lbs.



Shown with 12" chain spacer kit. See parts catalog for details.



Leveler

- Grade, finish, and spread topsoil and other landscape materials. Back fill trenches.
- Carry job site materials such as plants, fertilizer, irrigation supplies, and more.
- Length: 36", Width: 49", Height: 16", Weight: 170 lbs.



Stump Grinder

- Index position of blade adjusts up to 30°, allowing easy removal of roots.
- Cuts up to 36" above and 16.5" below grade.
- Wheel diameter: 17"; Teeth count: 12 carbide tipped, Wheel speed: 2000 rpm; Tooth tip speed: 145 ft/sec.
- Width: 44" with debris shield; Length: 20"; Height: 31"; Weight: 265 lbs.



Tree Forks

- Opens wide to handle large trees and shrubs.
- Angle design allows for gentle handling of materials.
- Overall width: 24.5"; Overall length: 45"; Overall height: 12.5"; Opening at tip: 25"; Weight: 169 lbs.

A Toro® Dingo® does it all.

Trench Filler

Designed for time and money-saving efficiency, this new attachment lets operators fill trenches in a single pass. Two sets of opposing augers direct the spoils from the sides of the trench back into the hole, while the filler levels off the work area — and fluffs the turf on each side of the trench — minimizing its footprint. Overall width: 62"; Working width: 48"; Auger diameter: 14"; Float distance: 6"; Weight: 410 lbs.



TX Platform

Quickly and easily bolted on to any Toro Dingo TX model*, this ride-on platform helps minimize operator fatigue — especially in applications requiring a lot of hauling and covering substantial distances. A special pivot point lets the platform flow up and down with the terrain, adding to operator comfort and safety. The platform can be flipped up — out of the way — any time the operator wishes. Width: 29"; Operating height (from ground): 5"; Weight: 94 lbs. *Excluding TX 413



Buckets

- Standard bucket: Holds 4.3 cubic feet; Width: 42".
- Narrow bucket: Holds 3.5 cubic feet; Width: 34.5".
- Light materials bucket: Holds 6.9 cubic feet; Width: 48".
- Optional tooth bars available. See parts catalog for details.



Universal Swivel Auger Power Head

- Ensures "plumb" holes on uneven terrain.
- Recommended for augers up to 18".
- Perfect for installing fences.
- Bit speed: 80 rpm @ 11 gpm.
- Torque: 1060 ft/lbs at 3000 psi @ 11 gpm.
- Dig up to 7' holes.
- Bit length 42"; 1' and 2' extensions available.



Bore Drive Head and Rod & Reamer Kit

- Easily bore under driveways and sidewalks to simplify irrigation and cable installations. Working depth: 19.38".
- Features universal joint keeping rods in horizontal digging position, regardless of head position.
- Standard Rod & Reamer Kit: Boring Bit: 1.75"; Reamer: 2.5"; Drill rods (4): .875" diameter, by 5'. Optional bits from 1.25"-2.5"; Optional reamers up to 4.5".

High-Torque Auger Power Head

1514 ft/lbs. of torque @ 3000 psi designed specifically to power up to 30" diameter auger in tough soil conditions. Heavy-duty motor, casting and bearings ensure years of performance.

Excellent for digging holes for trees, footings or irrigation valve boxes. Auger bits are available in sizes from 6" to 30". Bit length: 42"; Bitspeed: 54 rpm @11 gpm; 1' and 2' extensions available.



Soil Cultivator

Prepares a seed bed in one pass. Easily tills soil up to 5.5" deep. Adjustable grading bar and comb teeth "fluff" the soil, leaving the perfect germination environment for fresh seed or sod. Bury stones, soil clods, debris, and grass. Totally enclosed oil bath drive system increases power and torque to the tiller shaft and tines. Working width: 36"; Overall width: 51"; Overall height: 21"; Overall Length: 51"; Weight: 430 lbs.



Hydraulic Breaker

- Horizontal and vertical positions for demolishing driveways, sidewalks, steps, or walls.
- Powerful; delivers 180 ft/lbs of force and up to 1,250 blows per minute.
- Tool length: 10"; Tool diameter: 1.8"; Overall width: 24.5"; Overall length: 50"; Weight: 262 lbs.
- Optional bits available: 2" chisel; 6.5" asphalt; 8" tamper;moil bit. See parts catalog for details.



Cement Bowl

- Fighting mixes and holds cement in bowl.
- Mix, haul, and pour up to 200 lbs.
- Auger power head required (sold separately).
- Diameter: 25.15"; Length: 18.25"; Weight: 75 lbs.



Utility Blade

- Designed for versatility, this 48" blade angles 30° both right and left with the flip of a lever.
- The blade can be removed and rotated 180° to increase blade life.
- Overall width: 48"; Overall height: 20.75"; Overall weight: 140 lbs.

See what you could do with a Toro® Dingo® compact utility loader.

Tiller

Heavy-duty, high-torque design propels the hardened steel tines through any soil condition, including clay or hardpan. 40" wide and able to till more than six inches deep on one pass. Reversible tine direction allows you to free jams quickly and easily. Tine speed: 175 rpm @ 8 gpm; Overall width: 44"; Overall length: 20"; Height: 26"; Weight: 631 lbs.

Backhoe

This powerful attachment can be used for various jobsite activities—digging foundations, planting trees, trenching for irrigation and utilities installation and much more. Backhoe folds up to 34.5" wide, providing access to tight spaces and ease of transport. Features 180° bucket and swing arm rotation, an 82" digging depth, and comes standard with a 13" bucket. Transport height: 71"; Weight: 762 lbs; Stabilizer spread: 78"; Bucket digging force: 2450 lbs; Crowd arm digging force: 1250 lbs.



Rotary Broom

- Hydraulically adjust the sweep direction up to 50°. Sliding pivot joint allows the broom head to follow uneven terrain.
- Great for snow removal and jobsite cleanup.
- Overall width: 53"; Working width: 48"; Sweeping angle up to 25° right or left; Brush speed: 150 rpm.



Adjustable Forks

- Easily adjust forks to desired width.
- Carry fence posts, rocks, pallets, plants, fertilizer, irrigation supplies and more.
- Lift capacity: 335 lbs.; Maximum lift height: 61".



Snowthrower

- Two-stage design with the power to handle the toughest snow conditions.
- Great for snow removal and jobsite cleanup.
- Overall width: 53"; Working width: 48"; Sweeping angle up to 25° right or left; Brush speed: 150 rpm.

Power Box Rake

The Toro® power box rake is the perfect tool for seed bed and sod bed preparation. Easily adjust depth to fill, plane, and pulverize soil. The carbide teeth rotary drum on the power box rake pulverizes rough soil, cuts high spots and fills low spots in one pass. The roller drum removes rocks and debris, leaving a dimpled surface ideal for moisture retention. Reversible end plates permit forward or reverse operation. Adjustable yoke allows 20° offset. Overall width: 67"; Working width: 48"; Overall height: 40"; Overall length: 26"; Weight: 510 lbs.



Vibratory Plow

Reduce time and labor spent on irrigation or cable installations. Optimizes pipe-pulling performance while minimizing turf damage. Pulls pipe up to 18" deep. Elliptical vibrating motion moves pipe through difficult soil conditions. Compression springs allow the head to flex side to side for tight turning. Pipe size: up to 1.5" flexible polyethylene with standard bullet; 2" PVC or 80lb. polypipe with taperlock puller; Swing angle: +/- 30°. Plow cycle: 1390 vpm; Max. plow speed: 88 ft/min depending on soil conditions. Overall length: 34"; Overall width: 28.2"; Overall height w/out blade: 27"; Overall weight: 457 lbs.



Multi-Purpose Tool

- 3 tools in 1: ripper, towbar, boom.
- Ripper: 3 thick steel tines — great for digging & breaking up soil.
- Towbar: Accepts ball with 1" diameter threads (ball not included).
- Boom & chain length 45"; ideal for planting and hauling trees and shrubs.

Get the **competitive edge** other professionals have found in a Toro® Dingo® compact utility loader.

Watch your productivity skyrocket.

Get rid of rakes, shovels, wheelbarrows, axes, pry bars and other time-wasting hand tools. When you reduce hand labor with a Toro Dingo, you solve all kinds of problems. When a compact utility loader shows up on your site, it shows up on your bottom line. It's an investment that pays back fast — giving you more time, healthier crews, and top performance.

You'll **save** on labor costs from day one. Compare the costs of hand labor to the costs of a Toro Dingo and you'll see what it will do for your bottom line right away.

Add a Toro Dingo to your crew and watch what happens.

One guy can do the work of three. Jobs that used to take all day get done in a fraction of the time. You see less downtime and happier employees, as well as reduced turnover in your crew. And suddenly, you're seeing more time for more (and bigger) projects and a far more profitable year.

Compare the costs ... and see what a Dingo will do for your bottom line ...



Costs per hand laborer

	Weekly*	Monthly
Wage	\$360.00	\$1,559.98
FICA & Work Comp	\$23.76	\$102.95
Unemployment	\$0.72	\$3.11
Weekly Total	\$384.48	
Monthly Total		\$1,666.00
Annual Total		\$19,992.00

*Base hourly wage \$9.00

Toro Dingo landscape package

	Weekly*	Monthly
TX 425	\$101.51	\$439.88
Auger Power Head	\$13.78	\$59.72
15" Auger	\$2.92	\$12.66
30" Auger	\$4.49	\$19.45
36" Trencher w/chain	\$25.98	\$112.58
Standard Bucket	\$2.71	\$11.74
Leveler	\$3.13	\$13.55
Adjustable Forks	\$3.81	\$16.50
Fuel & Maintenance	\$46.15	\$200.00
Weekly Total*	\$204.48	
Monthly Total*		\$886.00
Annual Total*		\$10,632.00

*Based on 2006 MSRP financed at 5.9% for 48 months

"My payroll is down \$10,000 from last year after six months, and I would definitely attribute that directly to the Toro Dingo. You can't even estimate how much it has helped. It's amazing. I can use the compact utility loader to auger holes instead of employees hand-digging them and they're not nearly as tired. Their productivity is up even in the heat of summer, and it probably brought in an extra \$3,000 to \$4,000 a week."

— Ed Rinderspacher, Owner
Aqua-Pro Turf Irrigation,
Coralville, IA

Earn a fast return renting the Toro® Dingo® compact utility loader.



Trying to decide on your next, or first, rental equipment purchase? Consider a typical Toro Dingo system:

For landscaping, fencing, decking, irrigation, grading and DIY:

Toro 2006 MSRP		If you have daily rental prices of:		If you rent the Dingo on average:	
TX 413	\$12,396	TX 413 with Bucket	\$150	2 days a week	\$520
Auger Power Head	\$ 1,517	Auger complete	\$55	Rental revenue over 39 weeks of	
9" & 18" Augers	\$991	Total Daily Rental	\$205	the rental season	\$20,280
Trencher, 2'x4"	\$3,578	Upsell: Add Trencher for low-voltage lighting, wire and irrigation	\$55	Maintenance & fuel	\$475
Leveler	\$578			Income from Dingo	\$19,805
Adjustable Forks	\$704				
TX 413 Bucket	\$410	Total Daily Rental	\$260	ROI after 1 year	79%
Trailer	\$4,414				
Total	\$25,166				

"The Toro Dingo definitely increases revenue per rental. If a customer comes in and needs to dig a trench, plant a tree and move some dirt, he needs three machines. The Dingo can do all three on one platform. The customer saves money overall and we make more money on one transaction."

— Leonard Sedillo
Diamond Rental
Salt Lake City, UT

Toro® Dingo® Tracked Models Specifications

TORO DINGO TX TRACKED MODELS

TX 525	Kubota® 25 hp D902E2B
TX 525 Wide Track	Kubota 25 hp D902E2B
TX 420	Kohler® Command Pro® Series 20 hp
TX 425 Wide Track	Kohler Command Pro Series 25 hp
TX 413	Honda® GX390, 4-cycle, 13 hp

ENGINE

Fuel Type	Models TX 525: Diesel Models TX 420/TX 425/TX 413: Gas
Cooling System	Models TX 525: Liquid cooled Models TX 420/TX 425/TX 413: Air cooled
Fuel Tank	Models TX 525/TX 425/TX 420 – 6 gallons (23 liters); Model TX 413 – 3 gallons (11.4 liters)
Oil Capacity	Models TX 525 – 3.84 quarts (3.63 liters) Models TX 425/TX 420 – 2 quarts (1.9 liters) Model TX 413 – 1.16 quarts (1.1 liters)

HYDRAULIC SYSTEM


Pressure	Models TX 525/TX 425/TX 420 – 3000 psi Model TX 413 – 2540 psi
Flow	Models TX 525 – 13.8 gpm auxiliary; 6 gpm loader arm; 16.9 gpm traction (each pump) Models TX 425/TX 420 – 11.4 gpm auxiliary; 6 gpm loader arm; 16.9 gpm traction (each pump) Model TX 413 – 7 gpm combined
Reservoir Capacity	Models TX 525/TX 425/TX 420 – 10.5 gallons (40 liters) Model TX 413 – 10 gallons (38 liters)
Auxiliary Horsepower	Models TX 525; 24 hp Models TX 420/TX 425; 20 hp Model TX 413; 10 hp

TRACK

Standard	Models TX 525/TX 425 Wide Track – Endless Kevlar® reinforced rubber, 96.6" x 9.5", single internal tooth drive Models TX 525/TX 420/TX 413 – Endless Kevlar reinforced rubber, 96.6" x 5.9", single internal tooth drive
----------	---

TRACK DRIVE

Standard	Sprocket-Drive, 10 road wheels per side, cast iron track guide
Traction	Dual hydrostatic pump

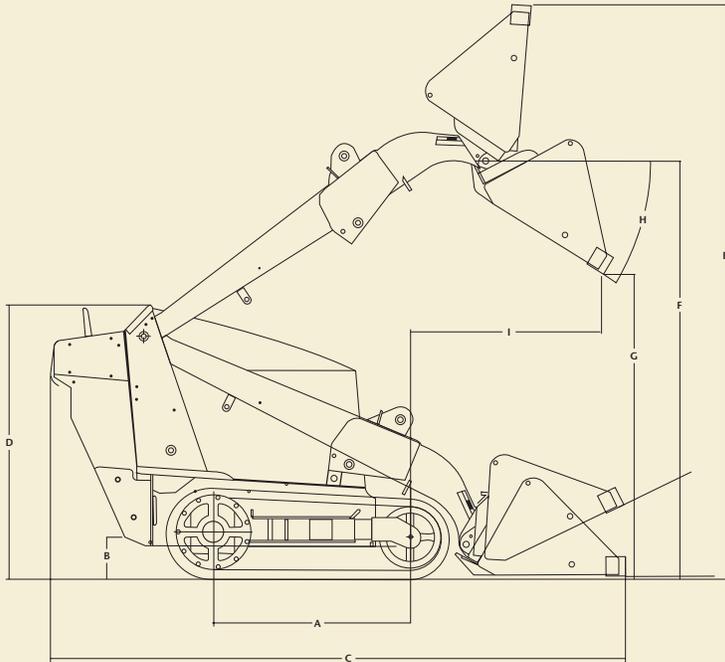

DIMENSIONS

	TX 525	TX 525 Wide Track	TX 420	TX 425 Wide Track	TX 413
Track Width	5.9"	9.5"	5.9"	9.5"	5.9"
A Wheelbase	31.2" (79 cm)	31.2" (79 cm)	31.2" (79 cm)	31.2" (79 cm)	31.1" (79 cm)
B Ground Clearance	4.6" (11.7 cm)				
C Overall Length	92" (233.7 cm) w/ bucket; 70.7" (180 cm) w/o bucket	92" (233.7 cm) w/ bucket; 70.7" (180 cm) w/o bucket	92" (233.7 cm) w/ bucket; 70.7" (180 cm) w/o bucket	92" (233.7 cm) w/ bucket; 70.7" (180 cm) w/o bucket	86.7" (220.2 cm) w/ bucket; 66.1" (167.9 cm) w/o bucket
Overall Width	33.7" (85.6 cm)	41" (104 cm)	33.7" (85.6 cm)	41" (104 cm)	33.7" (85.6 cm)
D Overall Height	46.1" (117.1 cm)	46.1" (117.1 cm)	46.1" (117.1 cm)	46.1" (117.1 cm)	42.5" (107.9 cm)
E Maximum Operating Height	90.1" (229 cm)	90.1" (229 cm)	90.1" (229 cm)	90.1" (229 cm)	76.4" (194 cm)
F Hinge Pin Height	65.8" (167.1 cm)	65.8" (167.1 cm)	65.8" (167.1 cm)	65.8" (167.1 cm)	48" (167.1 cm)
G Dump Height	46.1" (117.1 cm)				
H Dump Angle	38°	38°	38°	38°	45°
I Reach	21.8" (55.4 cm) fully raised	21.5" (54.6 cm) fully raised			
Ground Speed	0–4.5 mph forward, 0–2 mph reverse	0–3 mph forward, 0–1.5 mph reverse			
Tip Capacity	1580 lbs. (717 kg)	1580 lbs. (717 kg)	1530 lbs. (694 kg)	1530 lbs. (694 kg)	1200 lbs. (544 kg)
SAE J818 Rating 50% tip capacity	790 lbs. (360 kg)	790 lbs. (360 kg)	765 lbs. (348 kg)	765 lbs. (348 kg)	600 lbs. (272 kg)
SAE J818 Rating 35% tip capacity	553 lbs. (251 kg)	553 lbs. (251 kg)	535 lbs. (243 kg)	535 lbs. (243 kg)	420 lbs. (191 kg)
Weight (w/ std. bucket)	2030 lbs. (921 kg)	2127 lbs. (965 kg)	2006 lbs. (910 kg)	2186 lbs. (992 kg)	1466 lbs. (655 kg)
Weight (w/o bucket)	1904 lbs. (864 kg)	2001 lbs. (908 kg)	1880 lbs. (853 kg)	2060 lbs. (934 kg)	1340 lbs. (608 kg)
Ground Pressure	5.2 psi	3.4 psi	5.1 psi	3.5 psi	3.6 psi

See your Toro dealer for warranty details.

Toro® Dingo® Wheeled Models Specifications

TORO DINGO WHEELED MODELS

323 Kohler® Command Series 23 hp

220 Kohler Command Series 20 hp

ENGINE

Cooling System Models 323/220: Air cooled

Fuel Tank Models 323/220 – 2 tanks, 4 gallon (15 liter) capacity each

Oil Capacity Models 323/220 – 2 quarts (1.9 liter)

Air Filter Model 323 – High capacity dry-type remote air cleaner
Model 220 – Standard dry-type with pre-cleaner


HYDRAULIC SYSTEM

Pressure Models 323/220 – 3250 psi system relief pressure

Flow Models 323/220 – 4.0 gpm low-flow hydraulic circuit;
10.8 gpm high flow hydraulic circuit

Reservoir

Capacity 14.8 gallon (56 liter)

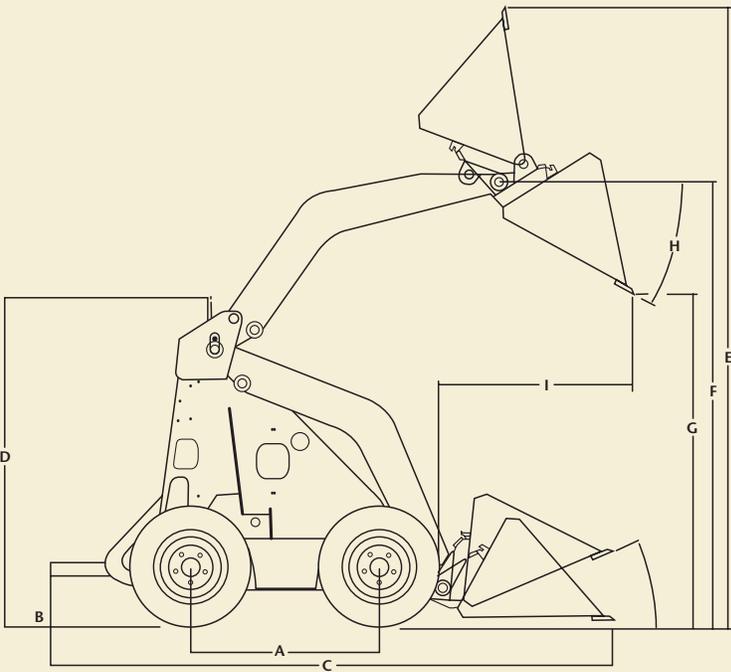

DIMENSIONS

323

220

A Wheelbase	28" (71 cm)	28" (71 cm)
B Ground Clearance	5.8" (15 cm) front; 5.8" (15 cm) rear	5.8" (15 cm) front; 5.8" (15 cm) rear
C Overall Length	62" (157.5 cm); 82.2" (208.8 cm) w/bucket	62" (157.5 cm); 82.2" (208.8 cm) w/bucket
Overall Width	40.5" (103 cm) standard tires; 35" (90 cm) narrow tires	40.5" (103 cm) standard tires; 35" (90 cm) narrow tires
D Overall Height	48.7" (123.7 cm)	48.7" (123.7 cm)
E Maximum Operating Height	91.2" (231.6 cm)	91.2" (231.6 cm)
F Hinge Pin Height	66" (167.6 cm) std. bucket – highest position	66" (167.6 cm) std. bucket – highest position
G Dump Height	47" (119 cm) std. bucket	47" (119 cm) std. bucket
H Dump Angle	34° std. bucket	34° std. bucket
I Reach – max.	28" (71.1 cm) std. bucket	28" (71.1 cm) std. bucket
Ground Speed	4.5 mph forward/reverse	4.5 mph forward/reverse
Tip Capacity	1030 lbs. (467 kg)	1030 lbs. (467 kg)
SAE J818 Rating 50% Tip Capacity w/ 200 lbs. (91 kg) operator	515 lbs. (234 kg)	515 lbs. (234 kg)
Weight (w/ std. bucket)	1713 lbs. (777 kg)	1576 lbs. (715 kg)
Weight (w/o bucket)	1567 lbs. (711 kg)	1430 lbs. (649 kg)

Extended Protection Plan

Toro® products are designed to last. To help preserve your investment and provide assurance of your long-term satisfaction, Toro offers the equipment industry's most comprehensive protection against unwanted repair bills. When your Toro warranty expires, Toro Protection Plus begins immediately and continues for the duration of the plan you purchased. Give yourself long-term peace of mind – ask your Toro dealer how to protect your investment with Toro Protection Plus. (Not available in Canada.)



Think and Live Safely

In addition to quality and innovation, safety is an important part of Toro's heritage. We care about the well-being of you and your family and encourage you to learn as much as possible about the safe operation of your Toro product.

Toward that end, we provide safety training materials that can help protect you, your employees, and your business.



Special Financing

Toro offers innovative financing programs to meet your purchase needs. Call 1-800-DIG-TORO, email Dingo@toro.com or visit your local dealer for current special offers.



For the Toro® Dingo® Dealer Nearest You ...

Visit toro.com/dingo to find out where to buy, service or rent a Dingo compact utility loader. Toro's "Dealer and Rental Locator" will connect you with the nearest dealer who can help put a Dingo loader to work for you or find one to rent. Our national network of factory authorized dealers also can provide you with genuine Toro parts and service support.

TORO.

Count on it.

Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, designs and standard equipment without notice and without incurring obligation. See your dealer for details on all of our warranties.